

SAILMAX TYRE CATALOGUE

KEERUN TIRE CO., LTD.



With special design and compound for only
use of road tractor, trailer or semi-trailer.



KEERUN TIRE (DEZHOU) CO., LTD
NO.399, NORTH KAIYUAN WEAT AVENUE, LELING CITY,
DEZHOU CITY,SHANDONG PROVINCE,CHINA North

KEERUN TIRE(RIZHAO) CO., LTD
GAOZE TOWN, WULIAN COUNTY, RIZHAO CITY,
SHANDONG PROVINCE, CHINA


<https://www.keeruntire.net>




SS992




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat super anti-wear formula



Excellent water evacuation performance



Good fatigue resistance




Ultra-high strength stiffness steel belt structure

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930



SS968/ SS968X


SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat super anti-wear formula



Excellent water evacuation performance



Good fatigue resistance



Irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930




ST988 / ST988X


SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat super anti-wear formula



Excellent water evacuation performance



Evenly distributes grounding pressure, low heat generation


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	15.5	9.00	3550/3250	152/149	L	930




SA966




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Excellent water evacuation performance




Evenly distributes grounding pressure, irregular wear resistance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
275/80R22.5	18PR	15.0	8.25	3250/3000	149/146	L	900



ST966




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance
formula design



Excellent water evacuation
performance




Evenly distributes grounding
pressure, irregular wear
resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	15.5	8.25	3000/2725	146/143	M	830
11R22.5	18PR	15.5	8.25	3250/3000	149/146	M	930
11R24.5	16PR	15.5	8.25	3250/3000	149/146	L	830
12R22.5	18PR	16.5	9.00	3550/3250	152/149	L	930
215/75R17.5	16PR	12.0	6.00	1750/1600	127/124	L	830
225/80R17.5	18PR	13.0	6.75	1550/1500	123/122	L	700
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830
255/70R22.5	16PR	13.0	7.50	2500/2300	140/137	L	830
265/70R19.5	16PR	14.0	7.50	2500/2360	140/138	L	775
265/70R19.5	18PR	14.0	7.50	2725/2575	143/141	J	850
275/70R22.5	18PR	15.0	8.25	3000/2725	146/143	L	900
275/80R22.5	18PR	15.0	8.25	3250/3000	149/146	L	900
295/60R22.5	18PR	16.0	9.00	3350/3075	150/147	L	900
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	M	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	L	900



ST955



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Using low heat generation
and high anti-wear
formula design



Excellent water evacuation
performance




Excellent grip
performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	15.5	9.00	3550/3250	152/149	L	930



SS998



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION ON FIRST-CLASS HIGHWAY
OR ROAD IN GOOD CONDITION



Widened tread design



Excellent loading
capacity



Excellent water
evacuation
performance




Excellent anti-
wear performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	18PR	17.0	8.25	3250/3000	149/146	L	930
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
12.00R20	20PR	16.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	16.5	8.50	4000/3650	156/153	K	900
13R22.5	20PR	17.0	9.75	4000/3650	156/153	K	930
295/80R22.5	18PR	16.0	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	16.0	9.00	4125/3750	157/154	L	900
385/65R22.5	20PR	16.5	11.75	4500	160	K	900
385/65R22.5	24PR	16.5	11.75	5000	164	K	930




ST805




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent steering quality and water evacuation
performance



Evenly distributes grounding pressure,
irregular wear resistance



Excellent heat dissipation performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	10.5	8.25	3000/2725	146/143	M	830
11R22.5	18PR	10.5	8.25	3250/3000	149/146	M	930



ST901




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and anti-wear formula design



Excellent water evacuation performance



Low heat generation


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
285/75R24.5	16PR	14.5	8.25	3075/2800	147/144	L	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	14.5	9.00	4125/3750	157/154	K	900



ST905



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Excellent anti-clamping stone and self-cleaning performance




Low heat generation

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	15.0	8.25	3000/2725	146/143	M	830
11R22.5	18PR	15.0	8.25	3250/3000	149/146	M	930

SA811



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

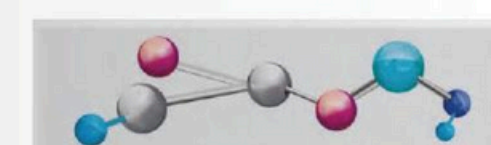

Excellent anti-clamping stone and self-cleaning performance



Stronge grip and resistance to wet traction




Evenly distributes grounding pressure, irregular wear resistance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	15.0	8.25	3000/2725	146/143	M	830
11R22.5	18PR	15.0	8.25	3250/3000	149/146	L	830
11R24.5	16PR	15.0	8.25	3250/3000	149/146	M	830
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	L	830




SA01




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Anti-wear performance

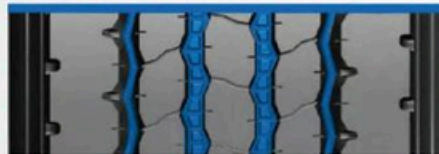

Anti-clamping stone performance

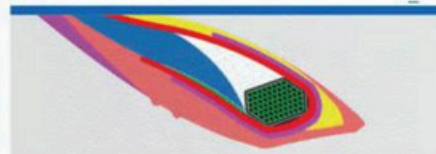


Excellent grip performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
215/75R17.5	16PR	13.0	6.00	1750/1600	127/124	L	830
225/70R19.5	16PR	14.0	6.75	1900/1800	130/128	L	830
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830




SD827



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good loading performance



Excellent durability



Good irregular wear resistance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	L	930




ST967



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and anti-wear formula design



Excellent water evacuation performance



Irregular wear resistance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	14.5	9.00	3550/3250	152/149	M	900
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	L	900



SD826



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance



Excellent braking, driving performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	21.0	9.00	3550/3250	152/149	K	930



SD398



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good puncture resistance

Strong grip and driving performance

Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	L	830
11R22.5	18PR	23.0	8.25	3250/3000	149/146	L	930
11R24.5	16PR	23.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830



SD803



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	20.5	8.25	3000/2725	146/143	M	830
11R22.5	18PR	20.5	8.25	3250/3000	149/146	M	930
11R24.5	16PR	20.5	8.25	3250/3000	149/146	M	830
295/75R22.5	16PR	20.0	9.00	3000/2725	146/143	L	830



SD817



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

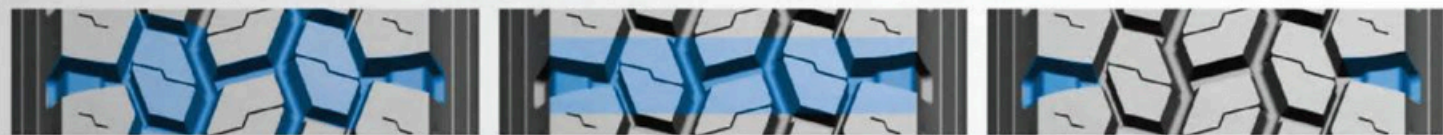

Good puncture resistance

Stronge grip and driving performance

Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	20.5	8.25	3000/2725	146/143	L	830
11R22.5	18PR	20.5	8.25	3250/3000	149/146	K	930
11R24.5	16PR	20.5	8.25	3250/3000	149/146	K	830



SD919



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Long driving mileage

High saturation pattern design

Optimized tire grounding marks prevents irregular wear


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	19.5	9.00	3550/3250	152/149	M	900



SD807



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat formula design



Good heat dissipation performance




Excellent control performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	18.5	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	20.5	9.00	4125/3750	157/154	K	900



SD867



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good traction performance



Excellent resistance of groove cracking



Excellent anti-clamping stone and self-cleaning performance



Excellent durability


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
245/70R17.5	18PR	15.5	7.50	2120/2000	134/132	K	900
225/70R19.5	16PR	15.5	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	15.5	6.75	2000/1900	132/130	K	900
265/70R19.5	16PR	16.0	7.50	2500/2360	140/138	L	775
265/70R19.5	18PR	16.0	7.50	2725/2575	143/141	J	850
215/75R17.5	18PR	15.5	6.00	2180/2060	135/133	J	850
235/75R17.5	18PR	15.5	6.75	2725/2575	143/141	J	875
225/80R17.5	18PR	14.0	6.75	1550/1500	123/122	L	700
315/80R22.5	20PR	20.0	9.00	4125/3750	157/154	K	900



SD909/SD909+/SD909++



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance



Excellent braking, driving performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	18.5	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900




SS979/SS979X

SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low rolling resistance and super anti-wear formula



Excellent water evacuation performance



Excellent distributes grounding pressure, good irregular wear resistance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930



ST917



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat formula design



Optimized groove bottom design



Strengthen bead design


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	16.5	9.00	3550/3250	152/149	L	900



SA878



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Excellent durability




High strength stiffness steel belt structure


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.5	9.00	3550/3250	152/149	L	930



SA859



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Ultra-high mileage



Irregular wear resistance



Excellent durability


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930




SA866



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Ultra-high mileage



Irregular wear resistance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930



SA899



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930



SD828



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	L	930



ST999



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	15.5	9.00	3550/3250	152/149	L	930



SA809X



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	16.0	9.00	3550/3250	152/149	L	930



SA819X



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	17.0	9.00	3550/3250	152/149	L	930



SA888



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.0	9.00	3550/3250	152/149	L	930



SA515



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	14.5	8.50	4500/4125	160/157	K	900



SA516




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	14.5	8.50	4500/4125	160/157	K	900



SA511



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	K	900



SS611



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	L	900



SS996



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	22PR	16.0	9.00	4500/4125	160/157	K	930
315/70R22.5	20PR	16.0	9.00	3750/3450	154/151	L	930
385/65R22.5	24PR	16.5	11.75	5000	164	K	930



ST610



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	14.5	11.75	4500	160	K	900




SA513




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	K	900


SA818/SA818A



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

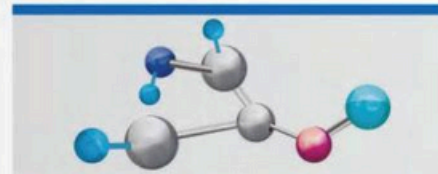

High anti-wear formula design

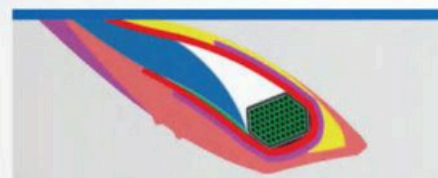

Optimized bead design



Excellent control performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	16.0	8.25	3000/2725	146/143	M	830
11R22.5	18PR	16.0	8.25	3250/3000	149/146	M	930
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
12.00R20	20PR	16.5	8.5	4000/3650	156/153	K	900
12.00R20	22PR	16.5	8.5	4000/3650	158/155	K	900
11R24.5	16PR	16.0	8.25	3250/3000	149/146	L	830
295/80R22.5	18PR	16.0	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	16.0	9.00	4125/3750	157/154	L	900
10.00R20	18PR	17.5	7.5	3250/3000	149/146	K	930
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900
12.00R24	22PR	17.5	8.50	5000/4750	164/162	K	900
13R22.5	20PR	18.0	9.75	4000/3650	156/153	K	930
325/95R24	20PR	17.5	9.00	5000/4750	164/162	K	900



ST903



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



High mileage



Reinforced skeleton material design



Optimized tire grounding marks design prevents irregular wear

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
245/70R17.5	16PR	14.0	7.50	2000/1900	132/130	L	830
245/70R17.5	18PR	14.0	7.50	2120/2000	134/132	L	900
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830



SA813




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent stone discharge performance



Good control performance



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	15.5	11.75	4500	160	L	900
385/65R22.5	24PR	15.5	11.75	5000	164	K	900




SD829



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good durability



Good heat dissipation performance




Good control performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	25.0	9.00	3550/3250	152/149	L	930




SA802




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Excellent durability



Good steering quality, anti-skid performance



Strengthen the design of tire body and bead

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930



SA812/SA812A /SA812+




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good tread heat dissipation



Wide adaptability road surface



Strengthened body and bead design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930
11.00R20	18PR	17.0	8.00	3550/3250	152/149	K	930
12.00R20	20PR	17.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	17.5	8.50	4000/3650	156/153	K	900
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900
11R22.5	16PR	15.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	15.0	8.25	3250/3000	149/146	M	930
12R22.5	18PR	15.0	9.00	3550/3250	152/149	K	930
13R22.5	20PR	17.5	9.75	4000/3650	156/153	K	930
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	K	900
315/80R22.5	22PR	16.0	9.00	4500/4125	160/157	K	930



SA816



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good durability



Good tear resistance of pattern groove




Good control performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	16.5	9.00	3550/3250	152/149	L	930



SA801/SA801+



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Excellent durability



Wide adaptability of
road surface



Anti-skid performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	16.0	7.50	3250/3000	149/146	K	930




SD838




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good driving performance



Good chunking resistance



Good loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	18.5	9.00	3550/3250	152/149	K	930



SD327




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Good driving performance



Good heat dissipation
performance



Good durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	19.0	7.50	3250/3000	149/146	K	930



SA898




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Excellent grip



Excellent durability and loading performance



Good heat dissipation on shoulder


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	16.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	16.5	8.50	4000/3650	156/153	K	900




SA823



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Ultra-long mileage



Anti-clamping stone design





Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	17.5	8.50	4500/4125	160/157	K	900



SA868/SA868+


SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD

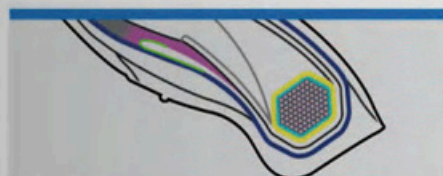

Excellent durability and loading performance



Anti-skid performance

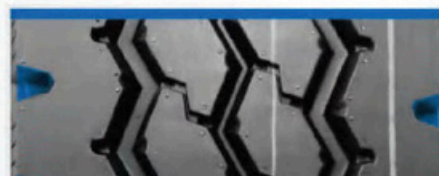


Wide adaptability of road surface

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	16.5	8.00	3550/3250	152/149	K	930
12.00R20	20PR	17.0	8.50	4000/3650	156/153	K	900
12.00R20	22PR	17.0	8.50	4000/3650	156/153	K	900



ST970


SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent wear resistance



Low fuel consumption

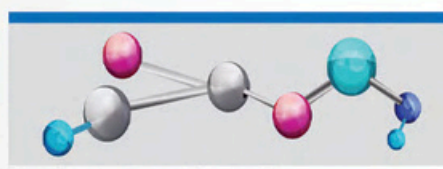

Low heat of tread formula

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
385/65R22.5	20PR	16.7	11.75	4500	160	K	900
385/65R22.5	24PR	16.7	11.75	5000	164	K	900
385/55R22.5	20PR	16.5	12.25	4500	160	K	900



SD309



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Good puncture resistance



Strong grip and driving performance



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	18PR	23.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	23.0	8.25	3250/3000	149/146	K	830



SD368



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Excellent self-cleaning performance



Groove bottom crack resistance



Excellent control performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	L	830
11R22.5	18PR	22.0	8.25	3250/3000	149/146	L	930



SD939




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Strong driving and braking performance



Good heat dissipation performance on shoulder



Excellent grip

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	18.0	9.00	3550/3250	152/149	L	900



SD959



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	22PR	21.0	9.00	4500/4125	160/157	K	930
315/70R22.5	20PR	21.0	9.00	3750/3450	154/151	L	930



SD308



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF ROUGH ROADS



Excellent driving, braking performance



Excellent durability



Low heat formula


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	20.5	9.00	4125/3750	157/154	K	900



SD338



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Tread puncture resistance



Tear resistance of pattern groove




Excellent braking and driving performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	18.5	9.00	4125/3750	157/154	K	900



SD929



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance




Excellent braking, driving performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900
295/80R22.5	18PR	22.0	9.00	3550/3250	152/149	K	900



SD376



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent durability and loading performance



Anti-skid performance



Good heat dissipation on shoulder


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930



SD806



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Small stone retention amount



Ground stress evenly distributed



High strength framework material

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R24.5	16PR	19.5	8.25	3250/3000	149/146	L	830
285/75R24.5	16PR	19.5	8.25	3075/2800	147/144	L	830
295/75R22.5	16PR	19.5	9.00	3000/2725	146/143	L	830



SD316



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Tear resistance performance



Excellent driving performance




Good heat dissipation performance on shoulder


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R24	20PR	20.0	8.50	4500/4125	160/157	J	900



SD306




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Low heat rubber formula design



Excellent grip, anti-skid performance

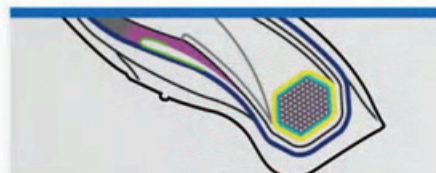

Good loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	19.5	7.50	3250/3000	149/146	K	930




SA315



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Good tread heat dissipation

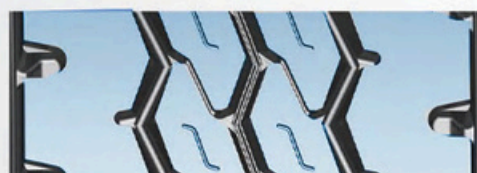

Good adaptability of road conditions



Zigzag pattern design, provides good water evacuation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
13R22.5	20PR	16.5	9.75	4000/3650	156/153	K	930



SD307



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Excellent durability and loading performance



Excellent driving and grip performance



Anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	19.0	7.50	3250/3000	149/146	K	930



SD312



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Excellent driving, braking performance



Good heat dissipation on shoulder



Strengthen the design of tire body and bead

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930



SD305



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
425/65R22.5	22PR	18.0	12.25	5300	166	K	900



SD318




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF ROUGH ROADS



Excellent grip and driving performance



Puncture resistance performance



Deepened pattern groove design


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	24.0	9.00	3550/3250	152/149	K	900



SD357




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent grip and driving performance



Puncture resistance performance



Good braking performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	G	830
11R22.5	18PR	23.0	8.25	3250/3000	149/146	G	930
11R24.5	16PR	21.0	8.25	3250/3000	149/146	G	830



SD358




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF ROUGH ROADS



Low heat and anti-wear formula



Excellent driving, braking performance



Excellent durability, loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	L	830
11R22.5	18PR	22.0	8.25	3250/3000	149/146	L	930



SD317




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Good driving performance



Good heat dissipation performance



Good durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	19.0	7.50	3250/3000	149/146	K	930




SD767/SD767+

SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF MIXED ROADS



Excellent grip and driving performance



Excellent durability, loading performance





Tear resistance pattern groove

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	D	930



SD359

SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent tear resistance performance



Excellent driving, braking performance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	18.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	18.5	8.50	4000/3650	156/153	K	900



SD369/SD369+

SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Good driving performance



Anti-clamping stone design



Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	19.0	8.50	4000/3650	156/153	K	900
12.00R20	22PR	19.0	8.50	4000/3650	156/153	K	900



SD319/SD319+

SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent loading performance



Excellent driving performance




Anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
13R22.5	20PR	21.0	9.75	4000/3650	156/153	K	930
11.00R20	18PR	20.0	8.00	3550/3250	152/149	K	930
12.00R20	20PR	21.0	8.50	4000/3650	156/153	K	900
12.00R20	22PR	21.0	8.50	4000/3650	158/155	K	900




SD329+




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Good driving performance

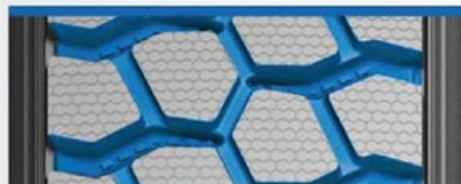

Excellent control performance

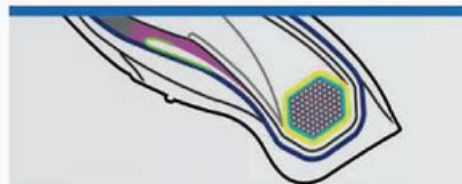

Excellent durability and loading
performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	19.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	19.5	8.50	4000/3650	156/153	K	900



SD837



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF MIXED ROADS




Tear resistance pattern groove



Excellent grip and driving
performance



Crown explosion-proof
performance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	K	930




SD339+



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD




Excellent durability of crown

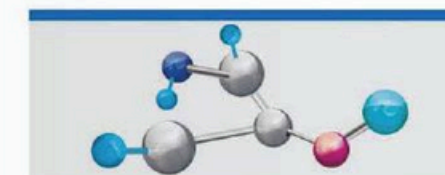

Excellent tear resistance



Strong driving ability

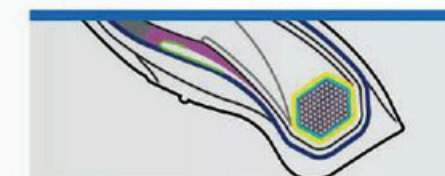

Good loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	18.5	8.50	4000/3650	156/153	K	900
12.00R20	22PR	18.5	8.50	4000/3650	156/153	K	900



SD737



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION

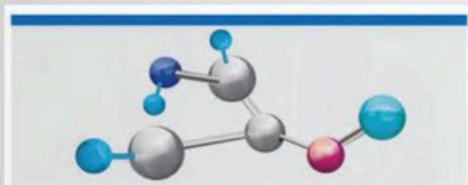

Excellent puncture resistance



Strong driving force



Excellent loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
10.00R20	18PR	23.0	7.50	3250/3000	149/146	D	930
12.00R20	20PR	24.0	8.50	4000/3650	156/153	G	900
12.00R20	22PR	24.0	8.50	4250/3875	158/155	G	900



SD717




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance, cut and chip resistance



Excellent driving and braking performance



Excellent loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	25.0	8.50	4000/3650	156/153	D	900
12.00R20	22PR	25.0	8.50	4000/3650	156/153	D	900



SD757




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance



Strong driving force



Excellent loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	23.0	8.50	4000/3650	156/153	G	900
12.00R20	22PR	23.0	8.50	4000/3650	156/153	G	900
13R22.5	20PR	23.0	9.75	4000/3650	156/153	G	930



SD707




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION



Excellent puncture resistance, cutting resistance



Excellent driving and braking performance



Excellent loading performance


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	24.5	8.50	4000/3650	156/153	D	900
12.00R20	22PR	24.5	8.50	4000/3650	156/153	D	900




SD727



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION

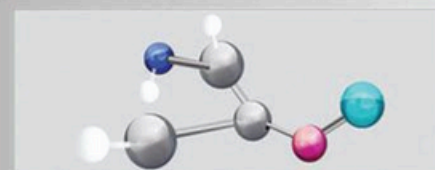

Excellent cutting resistance, explosion-proof performance

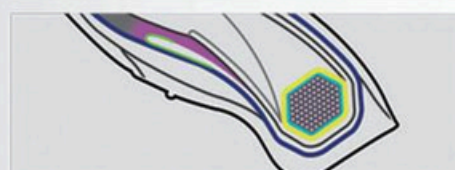

Excellent loading performance



Strong driving force


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900
12.00R20	22PR	26.0	8.50	4000/3650	158/155	F	900




SD777



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION

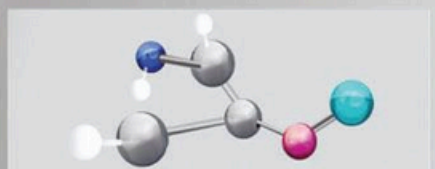

Excellent cutting resistance, explosion-proof performance

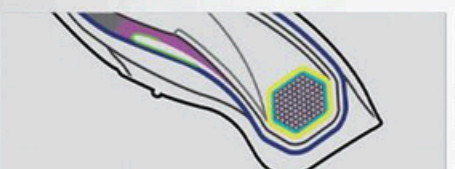

Excellent loading performance



Strong driving force


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11.00R20	18PR	24.0	8.00	3550/3250	152/149	D	930
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900
12R22.5	18PR	23.5	9.00	3550/3250	152/149	L	930




SD787



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON ROUGH ROADS TRANSPORTATION

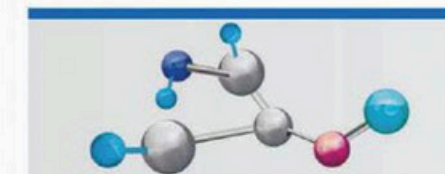

Excellent cutting resistance, explosion-proof performance

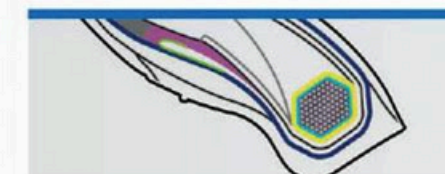

Excellent loading performance




Strong driving force

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	26.0	8.50	4000/3650	156/153	D	900
12.00R20	22PR	26.0	8.50	4000/3650	158/155	F	900




SD377S


SUITABLE FOR ONLY ROAD TRACTOR, TRAILER
OR SEMI-TRAILER ON WET ROAD TRANSPORTATION




3D sipe design



Excellent skid resistance



Excellent traction, braking performance



Special snow tread fomula design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	18PR	21.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	21.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830




SD336

SUITABLE FOR ONLY ROAD TRACTOR, TRAILER
OR SEMI-TRAILER ON WET ROAD TRANSPORTATION


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	25.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	25.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	25.0	8.25	3250/3000	149/146	K	830

SD378S


SUITABLE FOR ONLY ROAD TRACTOR, TRAILER
OR SEMI-TRAILER ON WET ROAD TRANSPORTATION

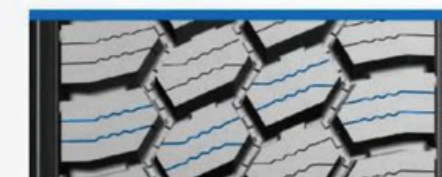


3D sipe design

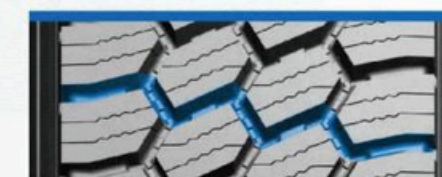

Excellent skid resistance

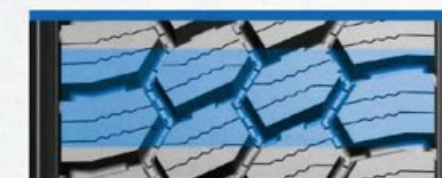

Excellent traction, braking performance

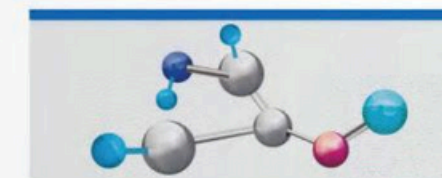

Special snow tread fomula design


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	21.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	21.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	21.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830



SDA01



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



3D sipe sheet design improves grip



Excellent control performance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	K	830
11R22.5	18PR	22.0	8.25	3250/3000	149/146	K	930
11R24.5	16PR	22.0	8.25	3250/3000	149/146	K	830



SD388




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF MIXED ROADS



Super smooth driving surface design



Excellent driving and braking performance

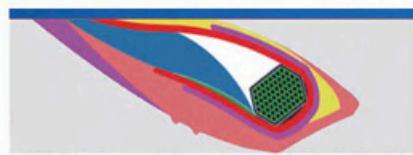


Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
295/80R22.5	18PR	21.0	9.00	3550/3250	152/149	K	900
295/80R22.5	20PR	21.0	9.00	3750/3450	154/151	G	930
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900
315/80R22.5	22PR	22.0	9.00	4500/4125	160/157	K	930



SD399



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Super smooth driving surface design



Excellent driving and braking performance



Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12.00R20	20PR	23.0	8.5	4000/3650	156/153	G	900
12.00R20	22PR	23.0	8.5	4250/3875	158/155	G	970
12R22.5	18PR	24.0	9.00	3550/3250	152/149	J	930
295/80R22.5	18PR	22.0	9.00	3550/3250	152/149	J	900
295/80R22.5	20PR	22.0	9.00	3750/3450	154/151	G	930
315/80R22.5	20PR	22.0	9.00	4125/3750	157/154	K	900
315/80R22.5	22PR	22.0	9.00	4500/4125	160/157	G	930



SD666



SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-SHORT DISTANCE TRANSPORTATION OF PAVED ROAD
AND MIXED ROAD



Excellent driving performance



Anti-clamping stone performance



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (KPA)
12R22.5	18PR	20.0	9.00	3550/3250	152/149	K	930

SDA02




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



3D siping design improves grip



Excellent handling performance

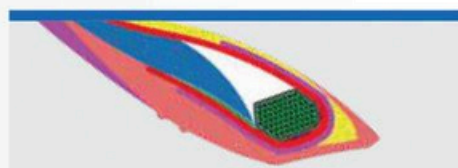


Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R24.5	16PR	22.5	8.25	3250/3000	149/146	K	830

SDA05




SUITABLE FOR ONLY ROAD TRACTOR, TRAILER OR SEMI-TRAILER
ON MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION

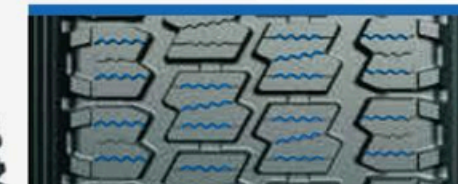

3D siping design improves grip



Excellent handling performance

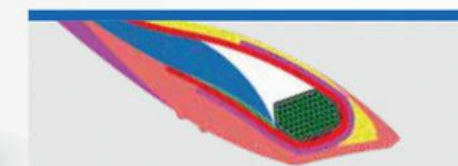

Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
225/70R19.5	14PR	16.0	6.75	1800/1700	128/126	M	760
225/70R19.5	16PR	16.0	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	16.0	6.75	2000/1900	132/130	K	900